

ZS2812


ZS2822

ZS2832

GB	LED Portable Floodlight SMD ACU
CZ	LED reflektor AKU SMD, přenosný
SK	LED reflektor AKU SMD, prenosný
PL	Naświetlacz przenośny LED SMD ACU
HU	LED reflektor akkumulátoros SMD ACU
SI	LED prenosni reflektor SMD ACU
RS HR BA ME	LED prenosni reflektor SMD ACU
DE	LED Akuscheinwerfer SMD AKU
UA	Світлодіодний LED прожектор AKU SMD, переносний
RO MD	Reflector LED AKU SMD, portabil
LT	LED nešiojamas prožektorius SMD ACU
LV	Pārnēsājamais LED prožektors SMD ACU
EE	Kantav LED-Prožektor SMD ACU
BG	Преносим светодиоден прожектор SMD ACU



www.emos.eu

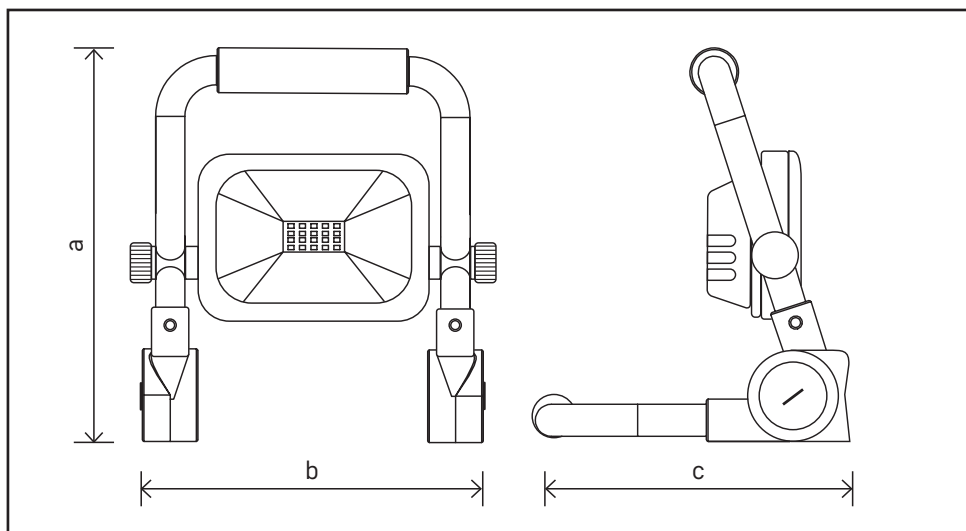

Type	Adaptor input voltage	Floodlight input voltage	Max. power	Battery	Charging time	Operating time
ZS2812	220–240 V AC 50 Hz	5 V DC	10 W	3.7 V / 4.4 Ah	4–5 h	3 h – 100 % max. 10 h – 25 %
ZS2822	220–240 V AC 50 Hz	5 V DC	20 W	3.7 V / 6.6 Ah	4–5 h	
ZS2832	220–240 V AC 50 Hz	5 V DC	30 W	3.7 V / 10 Ah	5–6 h	

Type	Life span	Luminous flux	Dimensions a × b × c	Weight	Maximum projected area	Ingress protection	Working temperature
ZS2812	25 000 h	1 000 lm	212 × 177 × 224 mm	0,96 kg	0,5 m ²	IP54	-20~40 °C
ZS2822	25 000 h	2 000 lm	266 × 220 × 273 mm	1,44 kg	0,73 m ²	IP54	-20~40 °C
ZS2832	25 000 h	3 000 lm	292 × 219 × 273 mm	1,81 kg	0,8 m ²	IP54	-20~40 °C

